



I.D. SOLUTIONS



info@idsolutions.co.nz


freephone 0800 443 227

DATACARD® TRU™ PHOTOSOLUTIONS



THE FASTEST, EASIEST IMAGE CAPTURE PROCESS FOR PHOTO IDS

Datacard Tru Photo solutions offer exceptional automated simplicity and deliver brilliant, true-to-life quality for full-color captured images.

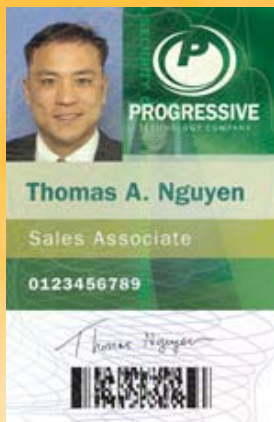

Datacard® Tru™ Photo solutions use a software-driven design that lets you capture the exact image you want without ever touching the camera. This fast, easy approach adds speed and productivity to any photo ID process.

- **Quick, one-click operation.** Tru Photo solutions incorporate auto-capture and auto-crop features to produce high-quality digital images in less than three seconds, with a single click of the mouse. No panning, tilting or zooming is required. Manual options are also available for additional flexibility.
- **Fully integrated photo ID system.** Tru Photo solutions offer easy, seamless compatibility with any product in the Datacard® ID Works® and ViaNet® identification software families. It makes a powerful addition to any integrated Datacard ID system.

The standard Datacard Tru Photo solution comes with Tru Photo software, an 8 megapixel digital camera and image capture accessories.




I.D. SOLUTIONS

the photo identification people

Datacard Group

SECURE ID AND CARD PERSONALIZATION SOLUTIONS

With Datacard Tru Photo software, a single click of the mouse captures the image, crops it to your pre-set specifications and makes it ready to print—all in less than three seconds.

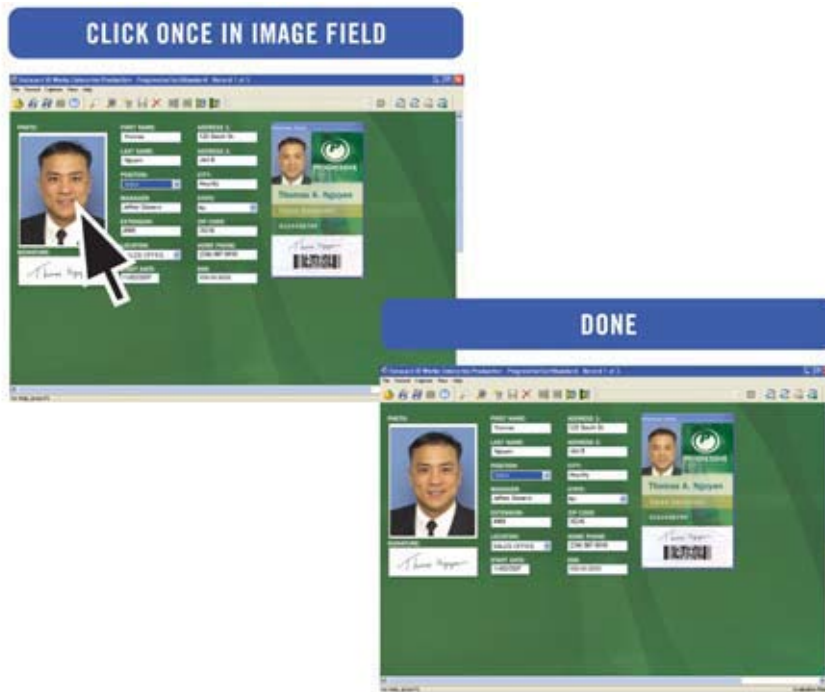

DATACARD® TRU™ PHOTOSOLUTION

CUSTOMER CONFIGURABLE CAPTURE SETTINGS

Auto capture

Operator clicks once in the image field and photo is immediately captured

Manual capture/live video

Provides live video for the operator to confirm positioning and facial expression

Auto crop

Image is automatically cropped to pre-defined ratio without operator intervention

Manual crop

The captured image can be resized by the operator by moving and sizing the boundaries of the cropping frame

White balance

Settings can be selected to capture the most realistic colors for your lighting environment

Red-eye reduction

When selected, the camera triggers a red-eye reduction lamp to eliminate the possibility of red-eye

TRU PHOTO SOLUTION

Components

Datacard Tru Photo Software with USB security key

8 megapixel digital camera

SD memory card SDC-16M

Standard USB cable

USB extension cable

AC power supply

Country-specific power cord

Tripod, backdrop, stand and frame

Installation instructions

Camera specifications

Physical dimensions (w x h x d)

4.28 in. x 2.81 in. x 1.84 in.
(108.7 mm x 71.4 mm x 46.7 mm)
Excluding protrusion

Weight

9.35 oz./265 g (camera body only)

Operating environment

Humidity: 10%-90%
Temperature: 32°-104° F (0°-40° C)

Flash range

Subject should be 2 to 6 feet
(.6 to 1.8 meters) from camera

Memory

SD memory card SDC-16M

Agency approvals

FCC, CE Mark, C-Tick, VCCI, GOST-R and EU RoHS compliant

TRU PHOTO PROFESSIONAL SOLUTION

Components

Datacard Tru Photo Software with USB security key

12.1 megapixel digital camera

Standard USB cable

USB extension cable

AC power adapter

Country-specific power cord

Tripod, backdrop, stand and frame

Installation instructions

Optional external flash components (120V/240V):

Flash

Bracket

Syncro cord and hot shoe adapter

Country-specific power cord

Camera specifications

Physical dimensions (w x h x d)

4.19 in. x 2.83 in. x 1.67 in.
(106.4 mm x 71.9 mm x 42.5 mm)
Excluding protrusion

Weight

11.29 oz./320 g (camera body only)

Operating environment

Humidity: 10% - 90%
Temperature: 32° - 104° F
(0° - 40° C)

Flash range

Subject should be 2 to 6 feet
(0.6 to 1.8 meters) from camera

Memory

32 MB memory card

Agency approvals

FCC, CE Mark, C-Tick, VCCI, GOST-R and EU RoHS compliant

Optional external flash specifications (120V/240V)

Adjustable for full, half and quarter power

Three second recycle time

Flash life 50,000 flashes minimum at full power

Recommended work distance of 6 to 15 feet (1.8 to 4.5 meters) depending on the environment

SYSTEM REQUIREMENTS

Operating system

Microsoft® Windows® 2000, XP or Windows Vista®

Peripherals

CD-ROM drive

2 available USB ports

System software

Datacard® ID Works® identification software

Datacard® ViaNet® identity information software



I.D. SOLUTIONS

I.D. Solutions 1993 Ltd.

32 Palm Beach Blvd

Palm Beach

Papamoa

Tauranga 3118

NEW ZEALAND

FR: 0800 443 227

FX: 07 574 7565

MB: 0274 900 710

EM: andy@idsolutions.co.nz

WB: www.idsolutions.co.nz

WB: www.idsnap.com

DatacardGroup

11111 Bren Road West

Minnetonka, MN 55343-9015

+1 952 933 1223

www.datacard.com

Datacard, Tru, ID Works and ViaNet are registered trademarks, trademarks, or service marks of DataCard Corporation in the United States and/or other countries. Microsoft, Windows and Windows Vista are registered trademarks of Microsoft Corporation.

Names and logos on sample cards are fictitious. Any similarity to actual names, trademarks or tradenames is coincidental.

©2004-2008 DataCard Corporation.
All rights reserved.

DC8-7005